

SMD Aluminum Electrolytic Capacitors

HL Series – High Temperature Chip Type 105°C 2000hrs



Specifications

Item	Performance																																																																								
Operating Temperature Range	-55 to+105℃							-40 to+105℃																																																																	
Rated Working Voltage Range	6.3 – 100VDC							160 – 450VDC																																																																	
Nominal Capacitance Range	1 – 8200μ F																																																																								
Capacitance Tolerance	± 20% (at+20℃ ,120Hz)																																																																								
Leakage Current	<table><tr><td>Rated Vol.</td><td colspan="5">6.3-100V</td><td colspan="5">160-450V</td></tr><tr><td>Time</td><td colspan="5">After 2 mins.</td><td colspan="5">After 5 mins.</td></tr><tr><td>Case size</td><td colspan="3">4 – 10mm dia.</td><td colspan="3">12.5 – 18mm dia.</td><td colspan="4">12.5 – 18mm dia.</td></tr><tr><td>Leakage Current</td><td colspan="3">I=0.01CV or 3(μ A), whichever is greater</td><td colspan="3">I=0.03CV or 3(μ A), whichever is greater</td><td colspan="4">I=0.04CV + 100(μ A), whichever is greater</td></tr></table> Where C=rated capacitance in UF, V=rated DC working voltage in V.											Rated Vol.	6.3-100V					160-450V					Time	After 2 mins.					After 5 mins.					Case size	4 – 10mm dia.			12.5 – 18mm dia.			12.5 – 18mm dia.				Leakage Current	I=0.01CV or 3(μ A), whichever is greater			I=0.03CV or 3(μ A), whichever is greater			I=0.04CV + 100(μ A), whichever is greater																					
Rated Vol.	6.3-100V					160-450V																																																																			
Time	After 2 mins.					After 5 mins.																																																																			
Case size	4 – 10mm dia.			12.5 – 18mm dia.			12.5 – 18mm dia.																																																																		
Leakage Current	I=0.01CV or 3(μ A), whichever is greater			I=0.03CV or 3(μ A), whichever is greater			I=0.04CV + 100(μ A), whichever is greater																																																																		
Dissipation Factor (tanδ) (120Hz\+20℃)	<table><tr><td>Rated vol.</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td><td>160-250</td><td>400-450</td></tr><tr><td>Dia. : 4 - 10</td><td>0.45</td><td>0.35</td><td>0.28</td><td>0.18</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.12</td><td>-</td><td>-</td></tr><tr><td>Dia :2.5 – 18</td><td>0.40</td><td>0.38</td><td>0.34</td><td>0.26</td><td>0.22</td><td>0.18</td><td>0.14</td><td>0.10</td><td>0.20</td><td>0.25</td></tr></table>											Rated vol.	6.3	10	16	25	35	50	63	100	160-250	400-450	Dia. : 4 - 10	0.45	0.35	0.28	0.18	0.16	0.14	0.12	0.12	-	-	Dia :2.5 – 18	0.40	0.38	0.34	0.26	0.22	0.18	0.14	0.10	0.20	0.25																													
Rated vol.	6.3	10	16	25	35	50	63	100	160-250	400-450																																																															
Dia. : 4 - 10	0.45	0.35	0.28	0.18	0.16	0.14	0.12	0.12	-	-																																																															
Dia :2.5 – 18	0.40	0.38	0.34	0.26	0.22	0.18	0.14	0.10	0.20	0.25																																																															
Characteristics at Low Temperature (stability at 120 Hz)	<table><tr><td colspan="3">Rated Vol.</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td><td>160-250</td><td>400-450</td></tr><tr><td rowspan="4">I.R.</td><td rowspan="2">Z (-25℃)</td><td>D<12.5</td><td>4</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td><td>3</td><td>-</td><td>-</td></tr><tr><td>/ Z (+20℃)</td><td>D≥12.5</td><td>5</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>3</td><td>6</td></tr><tr><td rowspan="2">Z (-55/-40℃)</td><td>D<12.5</td><td>12</td><td>8</td><td>6</td><td>4</td><td>3</td><td>3</td><td>3</td><td>4</td><td>-</td><td>-</td></tr><tr><td>/ Z (+20℃)</td><td>D≥12.5</td><td>10</td><td>8</td><td>6</td><td>4</td><td>3</td><td>3</td><td>3</td><td>3</td><td>6</td><td>10</td></tr></table>											Rated Vol.			6.3	10	16	25	35	50	63	100	160-250	400-450	I.R.	Z (-25℃)	D<12.5	4	4	3	2	2	2	2	3	-	-	/ Z (+20℃)	D≥12.5	5	4	3	2	2	2	2	2	3	6	Z (-55/-40℃)	D<12.5	12	8	6	4	3	3	3	4	-	-	/ Z (+20℃)	D≥12.5	10	8	6	4	3	3	3	3	6	10
Rated Vol.			6.3	10	16	25	35	50	63	100	160-250	400-450																																																													
I.R.	Z (-25℃)	D<12.5	4	4	3	2	2	2	2	3	-	-																																																													
		/ Z (+20℃)	D≥12.5	5	4	3	2	2	2	2	2	3	6																																																												
	Z (-55/-40℃)	D<12.5	12	8	6	4	3	3	3	4	-	-																																																													
		/ Z (+20℃)	D≥12.5	10	8	6	4	3	3	3	3	6	10																																																												


SMD Aluminum Electrolytic Capacitors

HL Series – High Temperature Chip Type 105°C 2000hrs



Load life	The specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied for 2,000 hours at 105℃ .																								
	<table><tr><td>Test Time</td><td colspan="4">2,000Hrs</td></tr><tr><td>Capacitance change</td><td colspan="4">Within ±25% of initial value for .D ≤6.3mm, within ±20% of initial value for .D ≥8mm.</td></tr><tr><td>Dissipation Factor(tanδ)</td><td colspan="4">Less than 300% of specified value for D ≤6.3mm, less than 200% of specified value for D ≥8mm..</td></tr><tr><td>Leakage Current</td><td colspan="4">Within specified value.</td></tr></table>					Test Time	2,000Hrs				Capacitance change	Within ±25% of initial value for .D ≤6.3mm, within ±20% of initial value for .D ≥8mm.				Dissipation Factor(tanδ)	Less than 300% of specified value for D ≤6.3mm, less than 200% of specified value for D ≥8mm..				Leakage Current	Within specified value.			
Test Time	2,000Hrs																								
Capacitance change	Within ±25% of initial value for .D ≤6.3mm, within ±20% of initial value for .D ≥8mm.																								
Dissipation Factor(tanδ)	Less than 300% of specified value for D ≤6.3mm, less than 200% of specified value for D ≥8mm..																								
Leakage Current	Within specified value.																								
Shelf Life	Test time 1,000hrs : other items are the same as those for the Endurance. The rated voltage shall be applied to the capacitors before the measurements for 160-450V .																								
Ripple Current & Frequency Multipliers	<table><tr><td>Freq. (Hz)</td><td>50</td><td>120</td><td>1k</td><td>10k up</td></tr><tr><td>Cap. Under 1,000 UF</td><td>0.80</td><td>1.00</td><td>1.25</td><td>1.40</td></tr><tr><td>Cap. :1,000 UF < C 6,800 UF</td><td>0.85</td><td>1.00</td><td>1.15</td><td>1.25</td></tr></table>					Freq. (Hz)	50	120	1k	10k up	Cap. Under 1,000 UF	0.80	1.00	1.25	1.40	Cap. :1,000 UF < C 6,800 UF	0.85	1.00	1.15	1.25					
Freq. (Hz)	50	120	1k	10k up																					
Cap. Under 1,000 UF	0.80	1.00	1.25	1.40																					
Cap. :1,000 UF < C 6,800 UF	0.85	1.00	1.15	1.25																					

Diagram of Dimensions

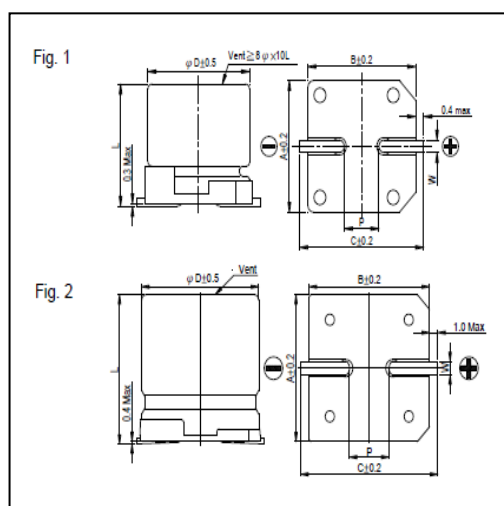

Lead Spacing and Diameter

Unit: mm

φD	L	A	B	C	W	P ± 0.2	Fig. No.
4	5.7 ± 0.3	4.3	4.3	5.1	0.5 ~ 0.8	1.0	1
5	5.7 ± 0.3	5.3	5.3	5.9	0.5 ~ 0.8	1.5	1
6.3	5.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
6.3	7.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
8	6.5 ± 0.3	8.4	8.4	9.0	0.5 ~ 0.8	2.3	1
8	10 ± 0.5	8.4	8.4	9.0	0.7 ~ 1.1	3.1	1
10	7.7 ± 0.3	10.4	10.4	11.0	0.7 ~ 1.3	4.7	1
10	10 ± 0.5	10.4	10.4	11.0	0.7 ~ 1.3	4.7	1
12.5	13.5 ± 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
12.5	16 ± 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
16	16.5 ± 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
16	21.5 ± 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
18	16.5 ± 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2
18	21.5 ± 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2

SMD Aluminum Electrolytic Capacitors

HL Series – High Temperature Chip Type 105°C 2000hrs



Case Size

Max ripple current: mA rms at 105°C. 120Hz (DxL mm)

W.V	6.3V		10V		16V		25V		35V		50		63		100V	
μF	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
1											4x5.7	8	4x5.7	8		
2.2											4x5.7	12	4x5.7	12		
3.3											4x5.7	14	4x5.7	17		
4.7							4x5.7	17	4x5.7	17	5x5.7	20	6.3x5.7	22		
10					4x5.7	20	4x5.7	20	5x5.7	27	6.3x5.7	32	6.3x5.7	32		
22	4x5.7	22	4x5.7	22	5x5.7	30	5x5.7	30	6.3x5.7	44	6.3x5.7	38	6.3x7.7	58	8x10	100
33	5x5.7	34	5x5.7	34	5x5.7	34	6.3x5.7	46	6.3x5.7	46	6.3x7.7	65	8x10	140	10x10	150
47	5x5.7	38	5x5.7	38	6.3x5.7	48	6.3x5.7	48	6.3x7.7	80	6.3x7.7	70	8x10	170	12.5x13.5	250
100	6.3x5.7	69	6.3x5.7	69	6.3x5.7	69	6.3x7.7	100	8x10	240	8x10	210	10x10.3	310	12.5x13.5	380
220	6.3x7.7	120	6.3x7.7	120	6.3x7.7	120	8x10 10x7.7	270 270	8x10	270	10x10.3	330	12.5x13.5	470	16x16.5	450
330	8x10	290	8x10	290	8x10 10x7.7	290 290	8x10	290	10x10	370	12.5x13.5	490	16x16.5	650	18x16.5 16x21.5	590 750
470	8x10	320	8x10 10x7.7	320 320	10x10	380	10x10	380	12.5x13.5	520	12.5x16	550	16x16.5	700	18x21.5	980
1,000	10x10	410	10x10.3	410	12.5x13.5	550	12.5x16	550	16x16.5	800	18x16.5	990				
2,200	12.5x13.5	680	12.5x13.5	680	16x16.5	900	16x16.5	900	18x16.5	1,050						
3,300	12.5x16	850	16x16.5	950	16x16.5	950	18x16.5 16x21.5	1,150 1,200								
4,700	16x16.5	1,000	16x16.5	1,000	18x16.5 16x21.5	1,225 1,275	18x21.5	1,300								
6,800	18x16.5 16x21.5	1,290 1,350	18x16.5 16x21.5	1,290 1,350												
8,200	18x21.5	1,450	18x21.5	1,450												

SMD Aluminum Electrolytic Capacitors

HL Series – High Temperature Chip Type 105°C 2000hrs



Max ripple current: mA rms at 105°C. 120Hz (DxL mm)

W.V	160V		200V		250V		400V		450V	
μF	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
3.3					12.5x13.5	60			12.5x13.5	40
4.7					12.5x13.5	65	12.5x13.5	45	12.5x13.5	45
10			12.5x13.5	80	12.5x13.5	70	12.5x13.5	50	12.5x16	75
22			12.5x16	110	12.5x13.5	105	16x16.5	85	16x16.5	85
33	12.5x13.5	95	12.5x16	120	16x16.5	180	18x16.5	100	18x16.5	100
47	16x16.5	240	16x16.5	220	16x16.5	220	18x21.5	130		
100	16x16.5	250	18x16.5	280	18x16.5	260				